

Navigator
Lets you browse through several pages of the display and select a line (the bottom line is active).



Light indicates messages received.

Mute key cuts off the microphone so that your party cannot hear you.

Intercom enables microphone so that you can automatically answer a call without lifting the receiver.

END key
To terminate a call or programming.

Audio keys



Alphabetic keypad

Protected by a flap; used for station dial by name, message service and programming. You have a self-adhesive 'Instruction' label to stick inside the flap.

Menu key
This key lets you:
• Obtain information about the telephone
• Program the keys

Display and display keys
Displays two lines and several 'pages' to offer information regarding your party and the features available via the keys associated with the displayed lines.

Programmable keys and icons
These keys are used to make a call, activate a service or manage your calls. Icons are associated with each of these keys:

Call icons:

- Incoming call (flashing).
- Call in progress.
- Call on hold.
- Call on common hold.

Feature icons:

- Feature active.
- Feature requiring action.
- Terminal or line busy.

Preprogrammed feature keys:

- Forward: Forward your calls to another terminal.
- Redial: Redial.
- Hold: Place a call on hold.
- Line: Access a line, or enter a feature code while in conversation.
- Call Log: Review the list of identified unanswered external calls.
- Store #: Temporarily store a number.
- Personal Directory: Access your personal directory.

Declaration of compliance

Warning: Earpiece may retain magnetic objects. The wording is not contractual and may be subject to change. Some functions of your telephone are controlled by a software key and the configuration of the unit.

This device complies with Part 15 of FCC Rules and with RSS-210 of Industry Canada. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications made to this equipment not expressly approved by Alcatel Business Systems may void the FCC authorization to operate this equipment.

Alcatel Business Systems, in keeping with its policy of constant product improvement for the customer, reserves the right to modify product specifications without prior notice. Copyright © Alcatel Business Systems 2005. All rights reserved.



Using your telephone

Making a call



To make an external call, dial the outside line access code (9) before dialing your party's number.

Answering a call



Redial




Making a callback request




Directory

Using dial by name

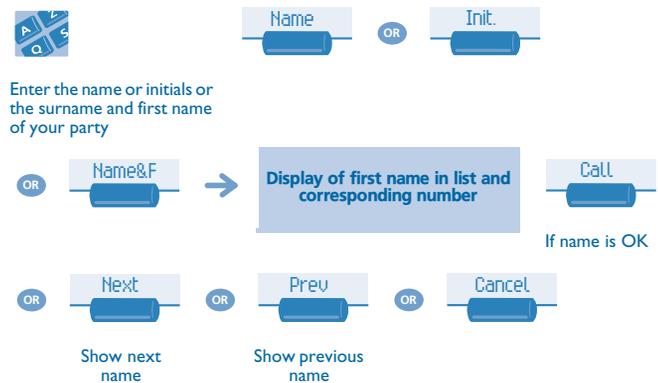

Programming your personal directory

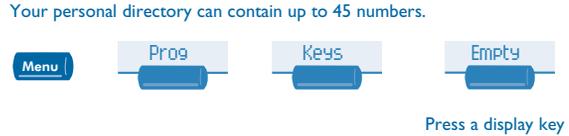


To call from your personal directory




Forward your calls

Forwarding your calls to another number

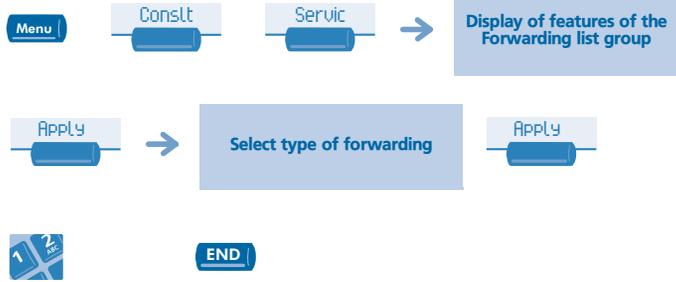


Dial number to be called

Forwarding your calls to your voice message service

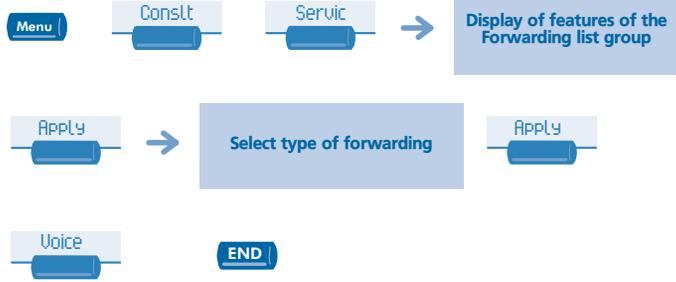

When you return, cancel all forwarding

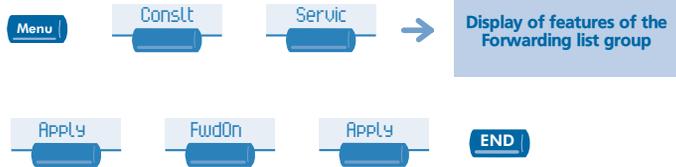

During a call

Placing a call on hold (HOLD)

During a call, you may place the call on hold and recover it later, on the same telephone.




Calling a second person during a call

During a call, you can call a second person (consultation call):




Answering a second call

During a call, another person is trying to call you.

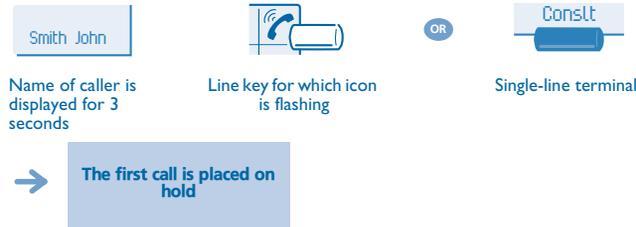

Switching between two calls (Broker call)

During a call, a second call is on hold. To alternate between calls:

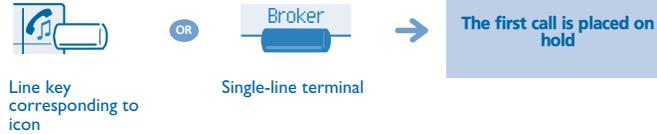

Transferring a call

During a call, you may transfer the call to another number.



Three-way conference

During a call, a second call is on hold.



Voice message service

Reviewing your voice mailbox


The light indicates that messages have been received.





Customize your terminal.

Programming your personal code


This code acts as a password controlling access to programming functions and the user 'Set Locking' feature (code by default: 0000).



Adjusting the audio features

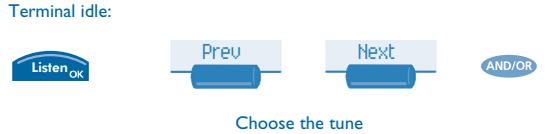


Adjusting screen brightness

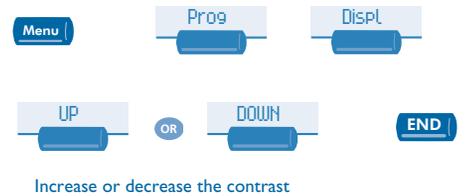

Installing the programmable key label

A printed label is supplied with the terminal. This should be installed beneath the key label covers.

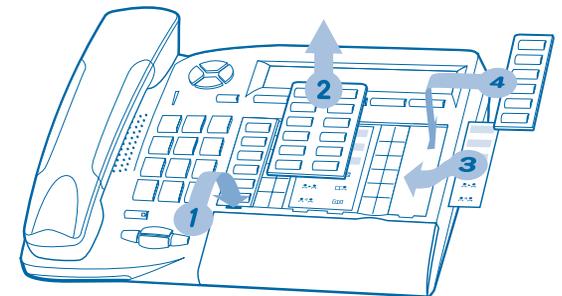

1. Insert a flat "blade" into the slot (1 slot per key block).
2. Raise the cover.
3. Slide the printed label into position.
4. Replace the cover.