

## Handset



Forum™ iPhone 720

### Navigation



**Up-down navigator:** used to navigate around the home page, through the menus or in a text zone when entering characters. The home page consists of:

- Information on the status of the set (set locked, call forward, etc.),
- Date and time,
- Set programming and configuration functions.



**OK key:** used to validate your choices and options while programming or configuring.



**Back/Exit key:** to return to previous menu (short press) or return to first screen (long press). You can also use this key to correct a character you entered.

### Function keys and programmable keys



**Guide key:** Use to obtain the name and number associated with the telephone, information on the pre-programmed keys or to access the set programming or configuration.



**Phone book key :** Phone book key to access your personal phone book (short press) or to make a call by name (long press or press twice)\*.



**Pre-programmed function keys and programmable key**

Lit when the function associated with the key is activated.

The 6-key block consists of:

- two line keys,
- one "immediate forwarding or cancel call-forward" key,
- one "conference" key,
- one "transfer" key,
- one direct call key to programme.

Only the line keys are enabled in 'safe' mode.



This symbol indicates the functions that can be accessed in 'safe' mode. According to the configuration the telephone system of your company, your phone set can automatically switch to 'safe' mode in case of loss of connection with the system, in order to ensure continuity of service. For more information, contact your installer or administrator. The 'safe' mode is only available for 8 Extended Edition Series.

### Audio keys



**Hang-up key:** to terminate a call.



**Hands-free/Loudspeaker Key:** to make or answer a call without lifting the receiver (Forum™ iPhone 710/720).

- Lit in hands-free mode or headset mode ; (short press).
- Flashing in loudspeaker mode(long press).



**Intercom/Mute key:**

- During a conversation: press this key so that your correspondent can no longer hear you.
- Terminal idle: press this key to answer calls automatically without picking up the receiver (Forum™ iPhone 710/720 Not available in 'safe' mode).



To adjust the loudspeaker or handset volume up or down

### Function keys



**Messaging key to access various mail services**

If the key flashes, a new voice message or a new text message has been received.



**"Redial" key :** to access the "Redial" function.

## Customize your terminal

### Modifying your personal code



Settings



Options



Phone



Password



follow informations displayed on the screen

### Lock / unlock your telephone



Lock



depending the displayed informations, enter your password or confirm\*

## Adjusting the audio functions



Settings



Phone



Ringing



adjust ringing (melody, volume, mode,...) by following instructions displayed on the screen



long press

## Adjusting screen brightness



Settings



Phone



Contrast



OR



increase or decrease the contrast



apply



long press

## Using your telephone

### Identify the terminal you are on



WhoamI



displays your telephone number



long press

### Making a call



OR



OR



OR



lift the receiver

hands free

line key / programmed line key

dial directly the number for your call

OR



OR



Dial by URI



calling from your personal directory

dial the number for your call



To make an external call, dial the outside line access code before dialling your correspondent's number.

### Receiving a call



OR



OR



lift the receiver

hands free (Forum™ iPhone 710/720)

line key with light flashing

### Redialling



last number redial

## Make a call-back request to a busy number




## During a conversation



Pre-programmed function keys are disabled in 'safe' mode. Use MENU keys to access these functions.

## Sending DTMF signals

During a conversation you sometimes have to send DTMF signals, such as with a voice server, an automated attendant or a remotely consulted answering machine. The function is automatically cancelled when you hang up.

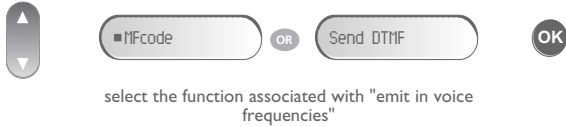

select the function associated with "emit in voice frequencies"



By default, your telephone in 'safe' mode is configured to send codes in voice frequency.

## Calling a second person during a conversation

During a conversation, to call a second person. (the first call is on hold)




dial directly the number for your call (not available in 'safe' mode.)

free line key

## Transferring a call

During a conversation, to transfer the call to another number:

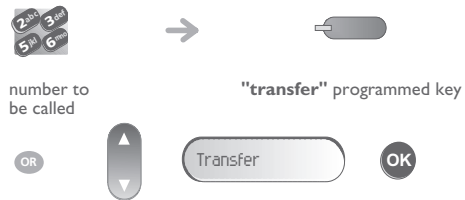

number to be called

"transfer" programmed key

## Three-way conference

During a conversation, a second call is on hold.



"conference" programmed key

Cancel conference and return to first correspondent




"conference" programmed key

## Voice message service

### Consulting your voice mailbox

If the key flashes, a new voice message or a new text message has been received.

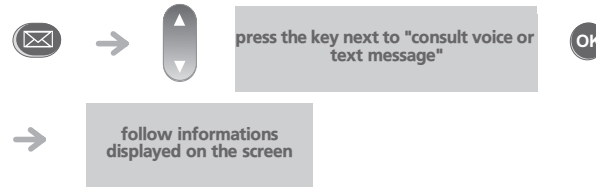


follow informations displayed on the screen

### Divert your calls to another number

Pre-programmed function keys are disabled in 'safe' mode. Use MENU keys to access these functions.

### Divert your calls to another number

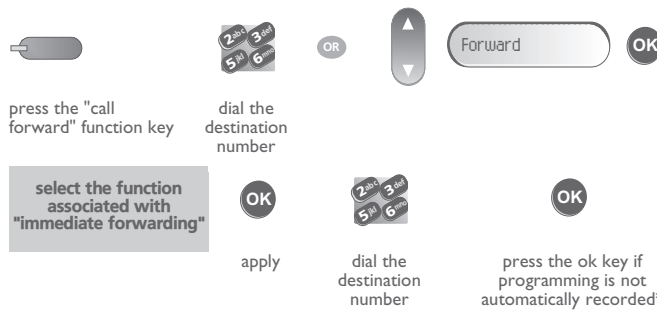

press the "call forward" function key

dial the destination number

select the function associated with "immediate forwarding"



apply



dial the destination number



press the ok key if programming is not automatically recorded\*

### Diverting calls to your voice mailbox



select the function associated with "immediate forwarding"

Press the OK key if programming is not automatically recorded\*.

### When you return, cancel all diversions



press the "call forward" function key



## Directory



Certain functions of this section depend on your telephone system, contact your installer or consult the appropriate User Guide (\*).

### Using call by name\*



long press

enter the first letters of the name

select the name from the displayed list

You enter your contact's name in predictive text mode. In this mode, enter each letter of the name by pressing only once on the key with this letter.

### Program the keys in the personal phone book



follow informations displayed on the screen

press and release

select a record in the directory (0-9)\*

### Make a call using the personal phone book



press and release

press the programmed key directly (0 to 9)

select the contact to call

start the call

## Guarantee and clauses

This document describes the services available on Forum™ iPhone 710-720/Phone 720 telephones connected to an Belgacom Forum 700 or Belgacom Forum 750 system. For more information, please consult the User Guide for your Forum™ iPhone 710/720 (IP set) or Phone 720 (digital set). Contact your installer.  
Warning: never place your telephone in contact with water. To clean your telephone, you may however use a damp soft cloth. Never use solvents (trichlorethylene, acetone, etc.) which may damage the plastic parts of your telephone. Never spray it with cleaning products.  
The ear piece and microphone area of the handset may attract metallic objects that may be dangerous for the ear.

The wording is not contractual and may be subject to change. Some functions of your telephone are controlled by a software key and the configuration of the unit.

To avoid accidentally damaging the set telephone line connector, make sure you position the cord correctly in the compartment intended for this purpose.

A copy of the original of this declaration of compliance can be obtained from your installer.

EC: We, Alcatel Business Systems, hereby declare that we assume the Forum™ iPhone 710-720 or Phone 720 product to be compliant with the essential requirements of Directive 1999/5/CE of the European Parliament and Council. A copy of the original of this declaration of compliance can be obtained from your installer.



Collection of these products at the end of their product life must be done selectively.  
**Environmental information**

1- The equipment that you bought has required the extraction and use of natural resources for its production. It may contain hazardous substances for the health and the environment. 2- In order to avoid the dissemination of those substances in our environment and to diminish the pressure on the natural resources, we encourage you to use the appropriate take-back systems. Those systems will reuse or recycle most of the materials of your end life equipment in a sound way. 3- The crossed-bin symbol invites you to use those systems. 4- If you need more information on the collection, reuse and recycling systems, please contact your local or regional waste administration. 5- You can also contact us for more information on the environmental performances of our products.

Belgacom, in keeping with its policy of constant product improvement for the customer, reserves the right to modify product specifications without prior notice. Copyright © Alcatel Business Systems. 2006. All rights reserved.

\* Depending on your telephone system, contact your installer or consult the appropriate User Guide.



0800 44 500  
Free