


My Instant Communicator for Alcatel-Lucent 8 Series 4038/4068

My Instant Communicator for Alcatel-Lucent 8 Series 4038/4068 provides quick and simple accesses to the main features of OmniTouch 8400 Instant Communications Suite. From a dedicated page (**Home** page), you will be able to:

- Search people
- Consult and handle your voice messages
- Consult and process your missed calls and callback requests
- Consult and manage your call history
- Activate and configure your call routing
- Set your presence and use Instant Messaging (IM)
- Access your personal contact list ("buddy list")
- Access and use conference features

Quick access to the main features from the Home page



The screenshot shows the Home page of the My Instant Communicator interface. At the top, it displays the date 'Fri 9 Jan 2009' and the time '12:08'. Below this are three tabs: 'perso', 'info', and 'home', with 'home' being the active tab. The main content area is divided into two columns. The left column contains: '0 voice' (with a voice message icon), '0 callback' (with a callback icon), '2 missed' (with a missed call icon), and a 'Search' button. The right column contains: 'Routing Off', 'IM On', 'Contacts', and '0 Conference'. Red arrows point from text labels to specific elements in the screenshot.

List of voice messages

List of callback requests

List of missed calls or call history

Search contacts

Call routing page used to select the routing mode for yours calls

Activate or deactivate Instant Messaging. When activated, select your presence status.

Contacts page (buddy list)

Conference sessions in progress

List of messages

Voice messages. From the list, you can:

- Listen to a message
- Call back the sender
- Delete a message
- See more details about a message





While listening to a voice message, following actions can be performed:

- Pause
- Stop
- Rewind to the beginning

Callback requests, missed calls, call history.

From the list, you can:

- Call back a party
- Delete an item
- Delete all items
- Display more information about an item

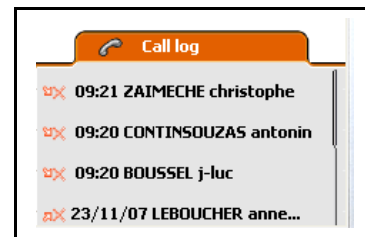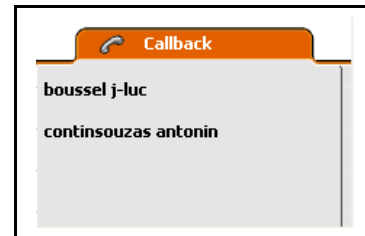


Searching contacts

Use the keyboard or the keypad from your IP Touch phone set to search people (by name, department or skill) or dialing out by number




Select a contact to:

- See the telephony presence and launch a call
- See the user presence and send an instant message
- Get more details or services (e.g. add the contact to your personal phonebook)

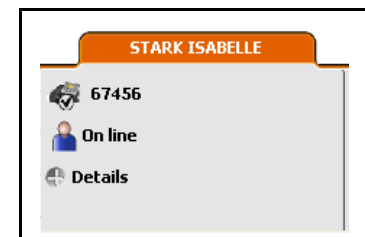


Activating call routing

Open your personal assistant for advanced call routing services

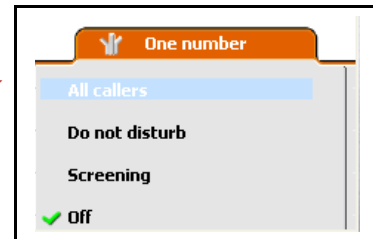


Use pop-up menus to select your destination number(s):

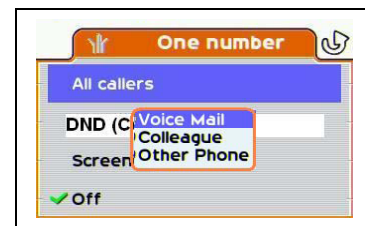

Activating IM and setting user presence



Set your presence status: online, busy, be right back, offline...

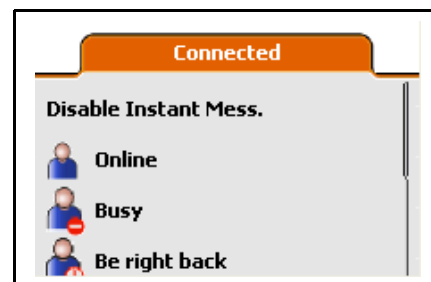


Use *Disable Instant Messaging* to deactivate IM on the phone set

Using contacts

Click the *Contacts* key from the Home page to open your buddy list




Select a contact to whom you want to send an instant message or start a voice call

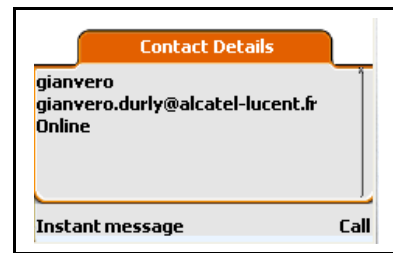

Select *Options* to display your contact groups, select the default contact group to be displayed, make a group call or call a phone number



Instant message: send and receive instant messages; use pre-defined messages to quickly answer your contact

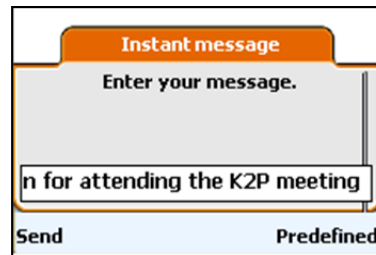

Managing conferencing

Click the *Conference* key from the Home page to open your current conferences


You can drop an Instant Messaging session and mute, hold or drop an audio conferencing session

- Example with 2 IM sessions and 1 audio conferencing session




Use the media of your choice for voice calls or instant messages

Incoming voice call

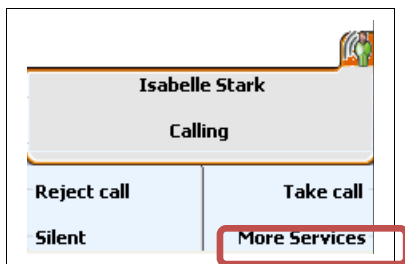



While in conversation...

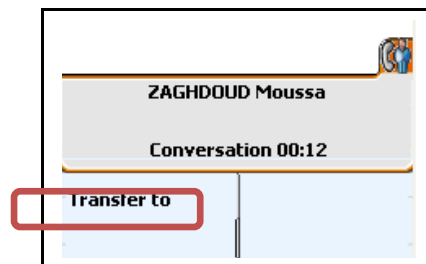

Use *More Services* to:


- Send an instant message (the voice call is forwarded to your voicemail)
- Forward the call to the voicemail
- Forward the call to an internal phone number (use of predefined phone numbers of your profile)

...transfer the call to another number

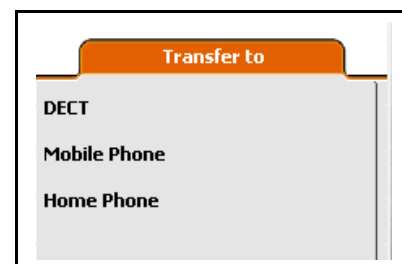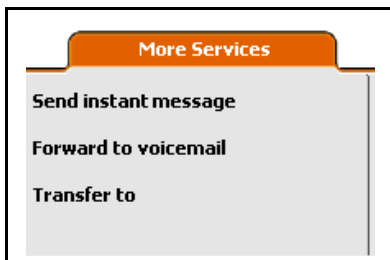


(predefined phone numbers of your profile)

Incoming IM

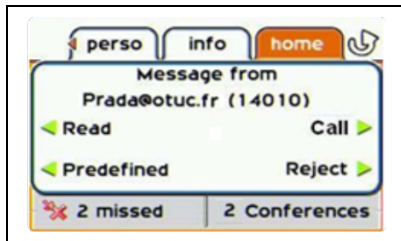

- Answer by voice (**Call**)
- Reply to the message (**Read**)
- Answer with a predefined message (**Predefined**)
- Reject the instant message (**Reject**)
- Answer later (use the hang up key of the phone set)

During a chat session

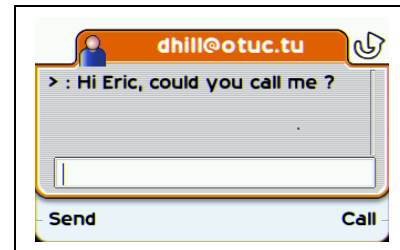


- See the telephony presence and call your correspondent (**Call**)
- Send your message (**Send**)
- Use the hang up key of the phone set to drop the chat session

Make an outgoing call. If your correspondent is busy, simply send an instant message



During a group chat, make an audio conference call with your correspondents (**Conference**)

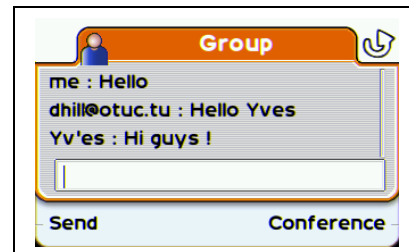

www.alcatel-lucent.com

Alcatel, Lucent, Alcatel-Lucent and the Alcatel-Lucent logo are trademarks of Alcatel-Lucent. All other trademarks are the property of their respective owners. Alcatel-Lucent assumes no responsibility for the accuracy of the information presented, which is subject to change without notice.

© Alcatel-Lucent 2009. All rights reserved.